


WET AREA CALL POINT  
MOMENTARY MODE

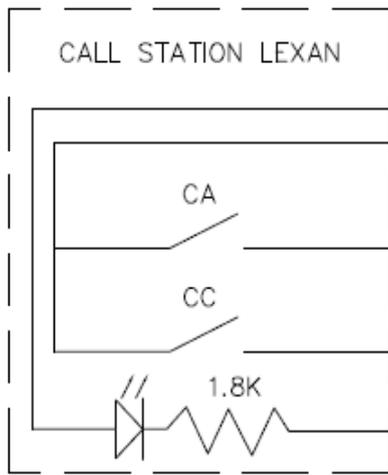

ORANGE

RED

WHITE


BLUE

YELLOW

CAT 5  
MULTISTRANDED

| R/C 6000 | CAREPLUS<br>NIM RJ PIN | R/C 3000                |
|----------|------------------------|-------------------------|
| P        | 1                      | #L (ORANGE)<br>SWC(RED) |
| CA       | 7                      | #C (WHITE)              |
| CC       | 8                      | #CC (BLUE)              |
| RL       | 2                      | 0VDC<br>(YELLOW)        |

WET AREA CALL POINT  
LATCHING MODE

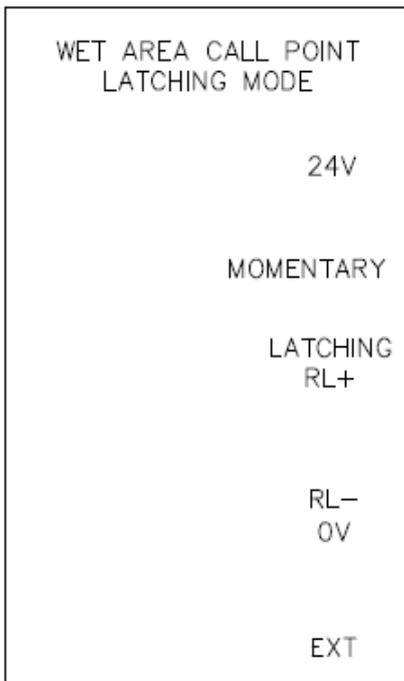

CAT 5  
MULTISTRANDED



NOTES:

1. SCOTCHLOKS AND SILICON MUST BE USED TO ENSURE WATER SEAL
2. STAINLESS STEEL CLIPSAL SCREWS CAPPED WITH SILICON MUST BE USED FOR MOUNTING
3. SEAL SPARE WIRES WITH SCOTCHLOKS